



*"Setting the World's
Performance Standards!"*

**Starting Line
Products, Inc.**

743 E. Iona Rd. Idaho Falls, ID 83401, (208)529-0244 Fax (208)529-9000

SLP PART #09-892

ATTENTION DEALER

**PLEASE PROVIDE YOUR CUSTOMER WITH THE
INSTALLATION AND INSTRUCTION DATA THAT IS
SUPPLIED IN THIS PACKET FOR THIS PRODUCT.**

Before you begin, please read the following:

The information contained in the instruction sheet supplied with this products is intended to provide complete setup and tuning specifications needed to have successful installation. It also acts as a reference guide for future tuning for altitude and temperature differentials. Varying from these standards can reduce performance and/or dependability.

Please read the following instructions for best results.

After completely following the setup instructions if you are experiencing difficulty SLP technical assistance is available online at the SLP website:

www.startinglineproducts.com

or by phone at 208-524-3397



"Setting the World's Performance Standards!"

Starting Line Products, Inc.

743 E. Iona Rd. Idaho Falls, ID 83401, (208)529-0244 Fax (208)529-9000

SLP Single Pipe Kit for 2011 Ski-Doo 800 E-TEC Summit P.N. 09-892

Effective Date:4/01/2013

Kit Contents:

- | | | |
|---|----------------------------|-----------------------------|
| 1 - Large Head Rivet (#090-42) | 1 - Rivet Washer (#090-44) | 1 - Pipe (#090-8921) |
| 1 - Silencer Outlet Seal (#090-2912) | 1 - Y-pipe (#090-8814) | 1 - Silencer (#09-302) |
| 1 - 30" reflective heat tape (#090-31) | 4 - Med Springs (#090-47) | 1 - Belt Holder (#090-8924) |
| 2 - Small Head Rivets (#090-43) | 2 - Spring Tabs (#090-697) | |
| 2 - Exhaust Gaskets(090-868) | | |
| 2 - Modified, 8mm Allen Bolts (#999-0153) | | |

Read instructions carefully and completely before attempting installation.

1. Remove stock muffler and exhaust pipe.
2. Heat each manifold (Y-pipe) screw for 30 seconds before loosening to prevent screw breakage.

Hint: For easier removal and installation of Y-pipe use a 6mm x 5" long 3/8" drive ball end allen wrench with a swivel and a long extension.

3. Remove manifold. (Retain OEM springs, grafoil seals, and Y-pipe bolts for reinstallation.)

NOTE: Chase the threads with an 8 mm x 1.25 tap to clean out all the Loctite.

4. Install SLP Y-pipe using supplied (2) SLP bolts on the **bottom inside** holes and OEM bolts on the other holes. Use supplied cylinder gaskets. (notched portion is for bottom inside bolts). Follow torque sequence shown.

5. From the inside of the left side footwell measure forward 2 1/2" and 1/2" in from the aluminum outlet plate. Drill a 3/16" hole and rivet into place with the provided spring tab with it facing forward (see illustration 1)

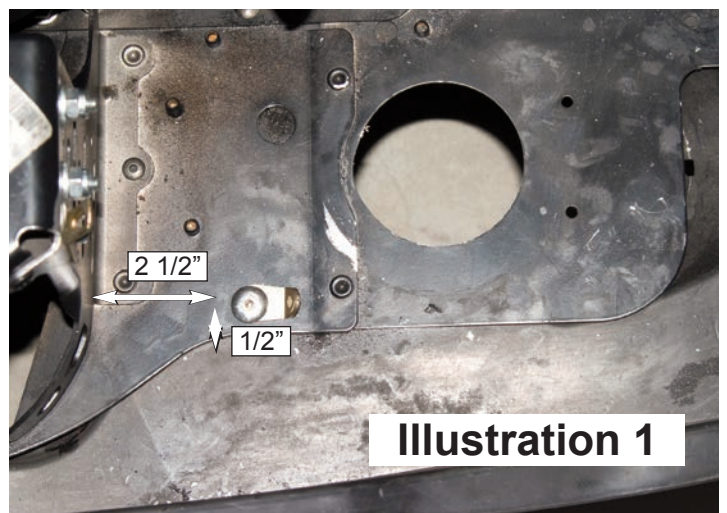
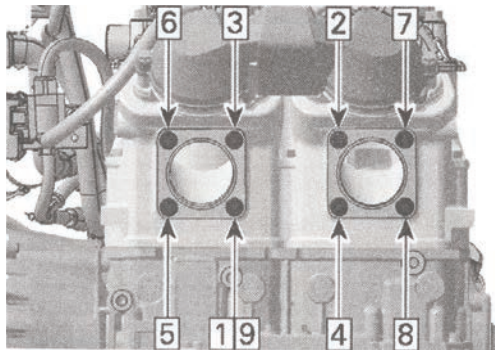
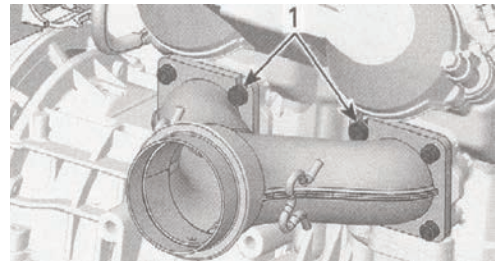


Illustration 1

6. Place supplied white silencer outlet seal on exhaust outlet. Install SLP lightweight silencer into stock outlet hole and spring into place using OEM springs.

7. Remove foam from the left front corner of the nose cone and cover with supplied reflective heat tape (see illustration #3).

8. Install SLP pipe using the OEM grafoil seals between the pipe and y-pipe and the pipe and silencer. Spring into place using OEM springs on the headpipe and stinger. Using the 4 medium springs provided double spring the head pipe.



9. Reinstall EGT probes into pipe and silencer torque to 33 ft/lbs (45 Nm),


10. Install belt relocation bracket onto the top of the right side footwell. Align backside and front corner with the inside top of the footwell (see Illustration #4) Scribe or mark the two holes. Drill using a 3/16" drill bit and rivet into place.

NOTE: It is recommended to fill y-pipe to pipe springs with Ultra Black Silicone (SLP Part #090-24).

Note: Do not remove the banding placed on the midsection of the pipe. It has been placed there to reduce noise emissions, improve performance and reliability. Check the tightness of the clamp every 100 miles for the first 300 miles and periodically thereafter.

SLP also recommends use of Hot Air Elimination Kits part # 32-555 and 32-556.

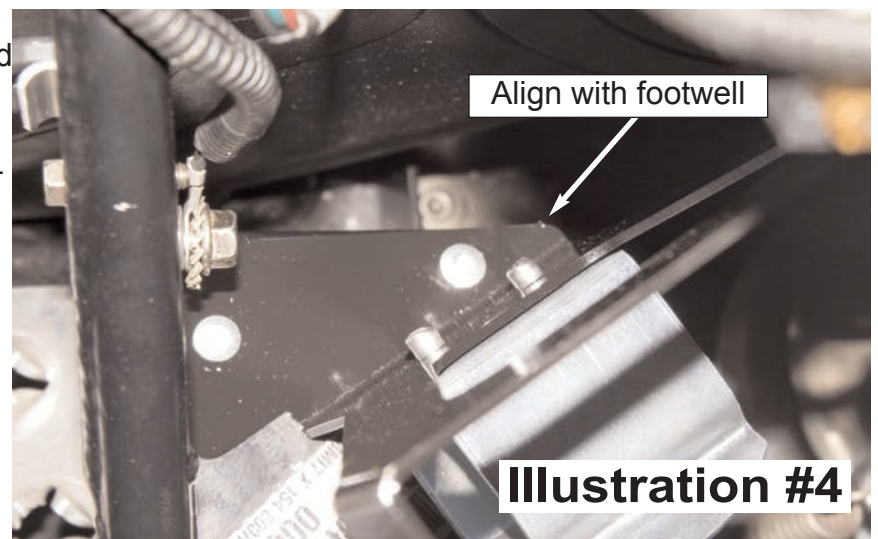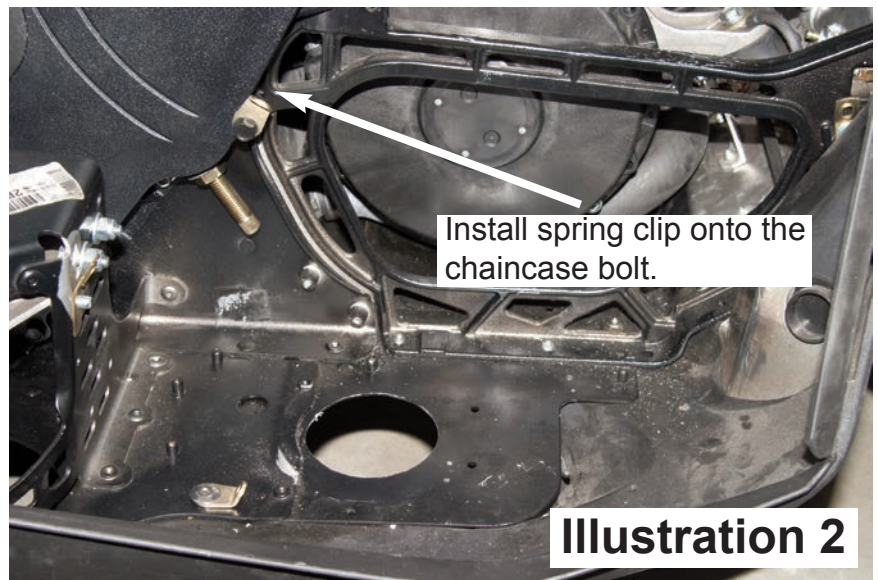

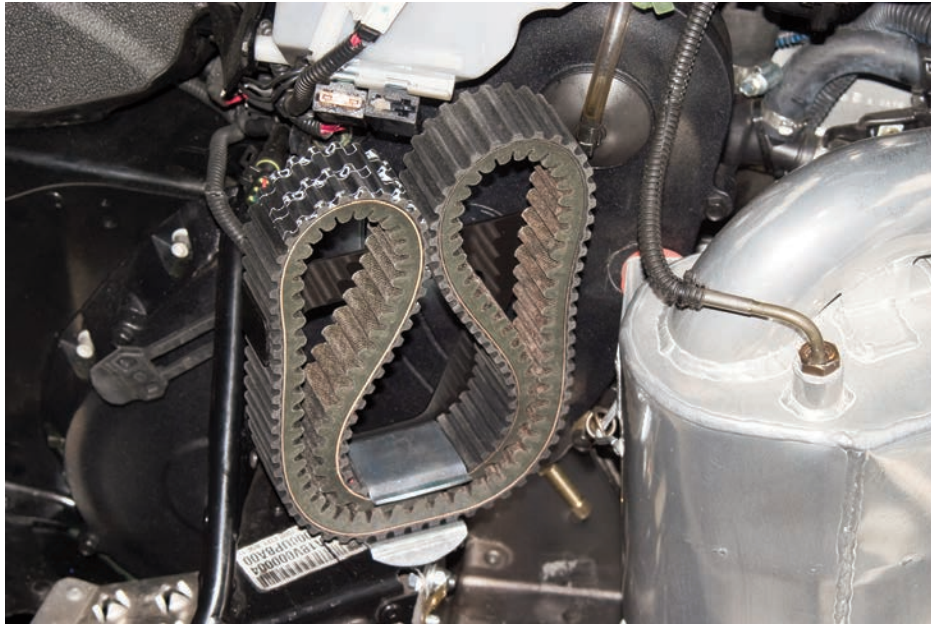

Spring Tension Adjustment:

Spring loop adjustment is suggested for proper spring tension to prevent leakage and wear (low tension), allow adequate flex (proper tension) and prevent spring breakage (excessive tension). When system is installed, the spring can be inspected for proper tension. The winding spacing at the center of the spring will indicate tension. When proper, the two center windings will have .040" to .050" clearance between them. This is easily tested with a feeler gauge. If tension is incorrect, the loop on the pipe or silencer can be bent in the direction needed to increase or decrease tension. Attach a vise grip firmly to the loop and bend.

FUEL REQUIREMENT: 91 octane minimum

If running for more than a mile at wide open throttle SLP recommends the use of Lucas Racing Formula Octane Boost.

Clutching for 2011 Ski-Doo 800 E-TEC Summit

IMPORTANT: The following clutching information has been thoroughly tested and is highly recommended for proper performance and reliability. Ramp profile, roller pin weight, drive spring and helix must be changed according to the chart if applicable for your elevation. Running any combination other than recommended may cause poor, inconsistent performance.

| Altitude | Drive Clutch | | | | Stock Driven Clutch | | TEAM Tied Clutch | | |
|--------------------------------------|---------------------------------------|--------------------------------|---|-------------------------------------|---------------------|--------|--------------------------------|----------------------------------|-----------------------------------|
| | Ramp Profile | Clicker Setting (Stock Clutch) | Roller Pin Weight | Spring | Helix | Spring | Clicker Setting (Stock Clutch) | Helix | Spring |
| 0-3000' (0-900m) | 413 Part # 417222508 (Stock) | #2 | Adj. Weight Pins #40-121 (13.8g empty, 1.5" long) 1ea. 2.2g set screw (0.5" long) 1ea. 0.8g set screw (0.25" long) Total Weight: 16.8g | Yellow/ Almond SLP #40-302 | Stock | Stock | #3 | TEAM Ind. 64-60F #50-224 | TEAM Ind. Red/Blue #50-4 |
| 3-6000' (900-1525m) | 415 SLP #40-201 | #1 | Adj. Weight Pins #40-120 (10.5g empty, 1.25" long) 2ea. 2.2g set screw (0.5" long) Total Weight: 14.9g | Yellow/ Almond SLP #40-302 | 43/47 (Stock) | Stock | #3 | TEAM Ind. 66-60.36 #50-212 | TEAM Ind. Blk/Purple #50-55 |
| 6-8000' (1525-2743m) | 415 SLP #40-201 | #2 | Adj. Weight Pins #40-120 (10.5g empty, 1.25" long) 1ea. 2.2g set screw (0.5" long) 1ea. 0.8g set screw (0.25" long) Total Weight: 13.5g | Yellow/ Almond SLP #40-302 | 43/47 (Stock) | Stock | #3 | TEAM Ind. 66-60.36 #50-212 | TEAM Ind. Blk/Purple #50-55 |
| 8000' & Above (Above 2743m) | 415 SLP #40-201 | #3 | Adj. Weight Pins #40-120 (10.5g empty, 1.25" long) 1ea. 2.2g set screw (0.5" long) Total Weight: 12.7g | Yellow/ Almond SLP #40-302 | 43/47 (Stock) | Stock | #5 | TEAM Ind. 66-60.36 #50-212 | TEAM Ind. Blk/Purple #50-55 |

NOTE: Test sled was a 2011 Ski-Doo 800 E-TEC Summit 154" with 19/45 gearing.

Running RPM 8000-8100

Caring for your ceramic coated pipes and/or silencer:

Ceramic Coating is an aluminum matrix applied to your exhaust system to provide a thermal barrier for more consistent performance. It is a coating which requires little maintenance to keep your pipes and/or silencer looking like new.

Upon completion of new installation, wipe the ceramic coated parts of the exhaust system down with brake cleaner. This will prevent oils and grease (usually in the form of fingerprints) from burning on and staining the exhaust during first initial startup.

To maintain your ceramic coated system, wash it with soap and water periodically (especially necessary after trailering it to and from your riding area on roads that have been treated with salt and other ice removing chemicals). Salt and other ice removing chemicals will attack and eat away at the ceramic coating. This will result in rust coming through the coating. Typically you will notice this rusting after your snowmobile has set for a period of time without the exhaust system being brought up to running temperature.

Periodically polish your ceramic coated pipes and/or silencer after each washing with an aluminum polish such as Mothers, Maas or Blue Magic aluminum polish that can be found at any automotive parts store. Do not use any acidic cleaners! For stubborn stains use fine 000 steel wool, then use a soft cloth with polish. Failure to maintain your ceramic coated pipes or silencer can result in damage to the ceramic coating for which there is no warranty coverage. A little care will insure that your pipes and/or silencer will continue looking like new for many years.

Note: In areas of the ceramic coated system where skin temperatures exceed 1300 degrees F, it is normal for the coating to turn dull gray. These areas should also be washed and polished periodically.